


RH

<http://www.fusigntronics.com>

型磁芯 Bead (Shield Type)


ORDERING CODE:

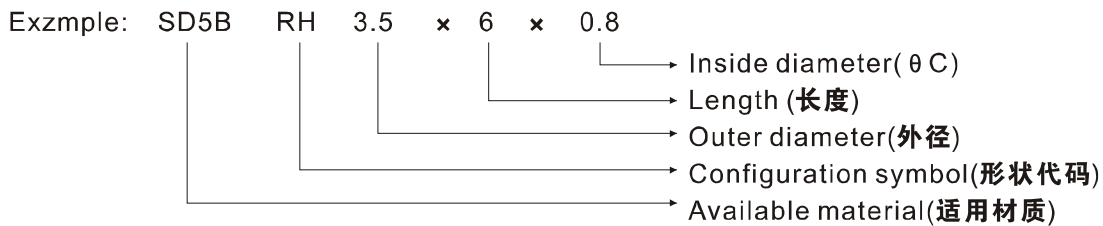

APPLICATION:

1. 抑制电磁干扰(Rid a circuit of EMI.)
2. 抗音频干扰(Referred to RFI.)
3. 计算机内外部主电缆
(Internal and external computer data power cables.)
4. 噪音抑制(Noise choke.)

CONFIGURATIONS

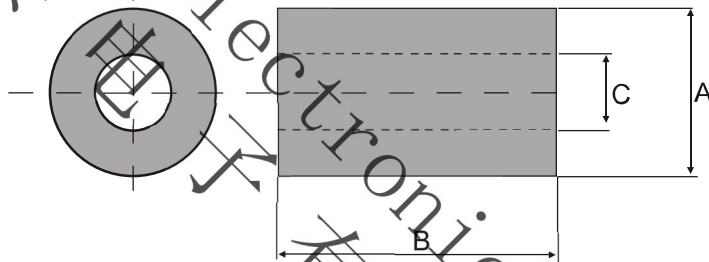

DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

Ordering code	A	B	C	Ordering code	A	B	C
RH2.5×1×1	2.5±0.1	1.0±0.2	1.0±0.15	RH7.5×7.5×2.39	7.5±0.2	7.54±0.3	2.39±0.2
RH3×1.7×1	3.0±0.1	1.7±0.2	1.0±0.15	RH9.7×10.4×4.7	9.7±0.3	10.4±0.3	4.7±0.2
RH3×12×1	3.0±0.15	12.0±0.4	1.0±0.15	RH12.8×15×8	12.8±0.4	15.0±0.4	8.0±0.4
RH3.5×4.5×0.8	3.5±0.2	4.5±0.3	0.8±0.15	RH14.2×28×6.35	14.2±0.6	28.0±0.8	6.35±0.4
RH3.5×6×1.3	3.5±0.2	6.0±0.3	1.3±0.15	RH14.2×28×6.7	14.2±0.6	28.0±0.8	6.7±0.8
RH3.5×8.9×0.8	3.5±0.2	8.9±0.3	0.8±0.15	RH14.2×28×8	14.2±0.6	28.0±0.8	8±0.8
RH3.5×12×1.2	3.5±0.2	12.0±0.4	1.2±0.15	RH17.5×17×9.5	17.5±0.8	17.0±0.6	9.5±0.6
RH3.5×12×1	3.5±0.2	12.0±0.4	1.0±0.15	RH17.5×28.5×9.5	17.5±0.8	28.5±0.8	9.5±0.6
RH4×10×2	4.0±0.2	10.0±0.3	2.0±0.15	RH18.4×28×9.5	18.4±0.8	28.0±0.8	9.5±0.6
RH6×30×2.5	6.0±0.2	30.0±0.1	2.5±0.2	RH25.7×28.5×13	25.7±0.8	28.5±0.8	13.0±0.8

*“B”尺寸可在合理范围内可调。

Fusign Electronics Co.,Ltd

Email: robinson@fusigntronics.com