

Low Voltage Current Transformers

AMC Series

AMC series current transformer is compact, smaller than other models with the current ratio of the transformer is small, clamshell-style terminal cover is well protected by the second terminal. With related accessories you can use Din rail mounting, a current from 5A to 2500A



◆ Features

- Safe, easy to install, portable
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations

◆ Applications

- Current measurement, monitoring and protection for electrical wiring and equipment.
- Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation – control system.
- Current, power and energy monitoring device.
- Relay protection device.

◆ Circuit connection diagram

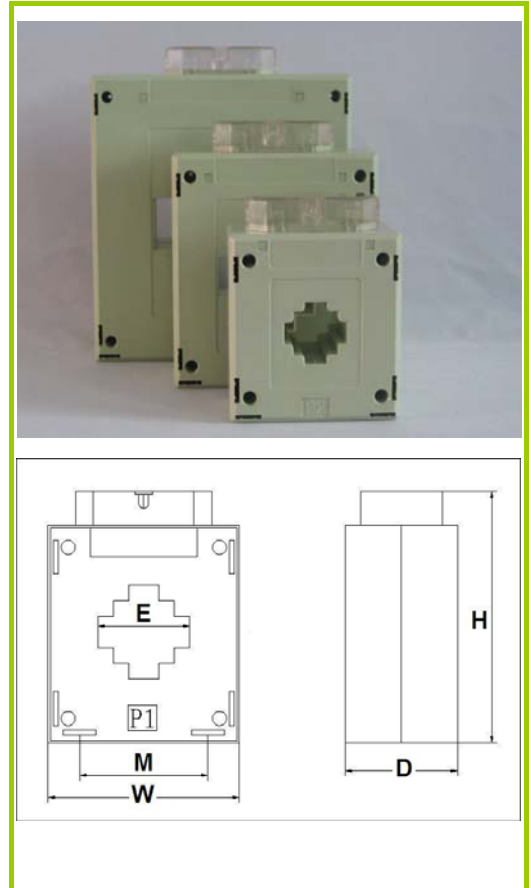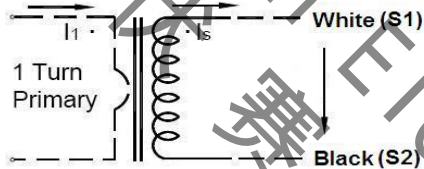

◆ Technique Index

Electrical Parameter	
Frequency	50-400Hz
Rated Input	5A-2500A
Measuring range	5%In-130%In
Rated Output	0-5A
Ratio	≤ ± 0.2%
Phase angle	≤ ±10min
Dielectric strength	2.5KV/1mA/1min
Insulation Resistance	DC500V/100MΩ min

Mechanical Parameter	
Case	PC /UL94-V0
Bobbin	PBT
Core	Silicon steel
Internal structure	Epoxy
Construction	Screw
Operating Temp	-25℃~+75℃
Operating Humidity	≤85%
Output Connection	Terminal

◆ Type Selection (Output: 1A/5A)

Mfg P/N	Rated Input (A)	Output (A)	Accuracy	Dimensions (mm)				
				E	M	W	H	D
AMC-30	5-400A	1A/5A	0.2、0.5、1.0	30	66	84	111	54
AMC-40	5-800A	1A/5A		40	76	84	111	54
AMC-60	5-1500A	1A/5A		60	93	110	147	54
AMC-80	5-2500A	1A/5A		80	136	154	187	54