



型磁芯 (CORE R TYPE)

ORDERING CODE:

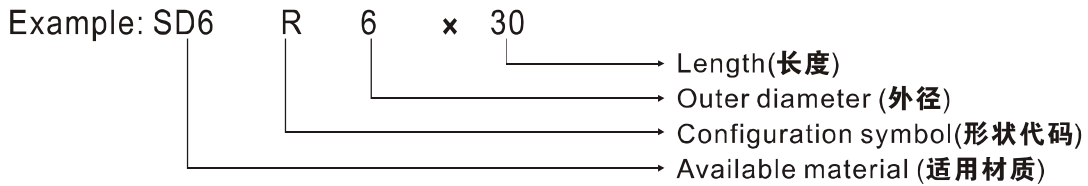

- APPLICATION: 1.微分输入滤波器(Differential input filters.)
2.SCR扼流圈(SCR choke)
3.音频交互网络用电感器(Inductors in audio crossover networks.)
4.脉冲变压器(Pulse transformers.)
5.振荡线圈(Oscillating coil.)
6. μ 调整线圈(μ tuning coil.)
7.遥控天线(Antennas of Remote control.)

CONFIGURATIONS:

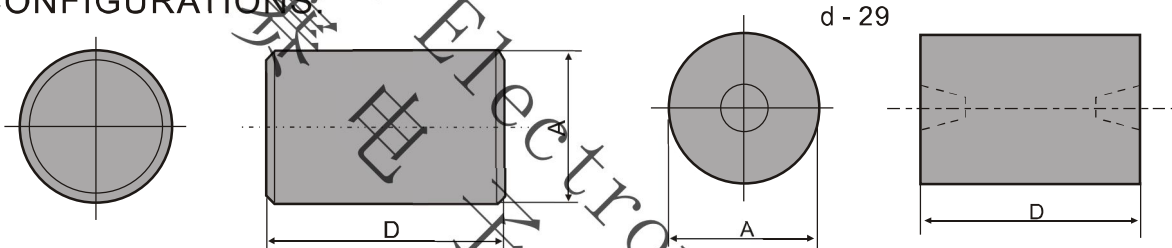

DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

Ordering code	A	D	Ordering code	A	D
R 1.2 x 5.8	1.2 ± 0.1	5.8 ± 0.2	R 6 x 20	6 ± 0.15	20 ± 0.4
R 1.85 x 7.7	1.85 ± 0.1	7.7 ± 0.3	R 6 x 30	6 ± 0.15	30 ± 0.8
R 3 x 10	3.0 ± 0.1	10 ± 0.3	R 6.5 x 15	6.5 ± 0.15	15 ± 0.4
R 3 x 14	3.0 ± 0.1	14 ± 0.4	R 6.5 x 30	6.5 ± 0.15	30 ± 0.8
R 3 x 20	3.0 ± 0.1	20 ± 0.5	R 7.6 x 30	7.6 ± 0.15	30 ± 0.8
R 3.5 x 7.5	3.5 ± 0.1	7.5 ± 0.3	R 7.6 x 40	7.6 ± 0.15	40 ± 0.8
R 3.5 x 14	3.5 ± 0.1	14 ± 0.4	R 8 x 15	8 ± 0.2	15 ± 0.4
R 3.7 x 14	3.7 ± 0.1	14 ± 0.4	R 8 x 32	8 ± 0.2	32 ± 0.8
R 4 x 9	4.0 ± 0.1	9 ± 0.3	R 9.5 x 19	9.5 ± 0.2	19 ± 0.5
R 4 x 16	4.0 ± 0.1	16 ± 0.5	R 9.53 x 25.4	9.53 ± 0.2	25.4 ± 0.8
R 4 x 20	4 ± 0.15	20 ± 0.6	R 9.35 x 31.75	9.53 ± 0.2	31.75 ± 0.8
R 4 x 25	4 ± 0.15	25 ± 0.8	R 10 x 18	10 ± 0.2	18 ± 0.5
R 4.5 x 30	4.5 ± 0.15	30 ± 0.8	R 10 x 21	10 ± 0.2	21 ± 0.6
R 5 x 15	5 ± 0.15	15 ± 0.4	R 10 x 30	10 ± 0.2	30 ± 0.8
R 5 x 25	5 ± 0.15	25 ± 0.8	R 10 x 40	10 ± 0.2	40 ± 1.0
R 5 x 30	5 ± 0.15	30 ± 0.8	R 15 x 35	15 ± 0.2	35 ± 0.8

*“D”尺寸在合理范围内可调。

Fusign Electronics Co., Ltd

Email: robinson@fusigntronics.com