

RHH R4H R6H

<http://www.fusigntronics.com>

型磁芯 Balun (Multi-Aperture Type)

用途：①整合变压器

②各种变压器

APPLICATIONS:①BALUN TRANSFORMERS


②VARIOUS RF TRANSFORMERS

ORDERING CODE:

Example: SD6 R6H 6 × 10 × 0.9

- Hole (φ C)
- Length (长度)
- Outer diameter (外径)
- Configuration symbol (形状代码)
- Available material (适用材质)

CONFIGURATIONS:

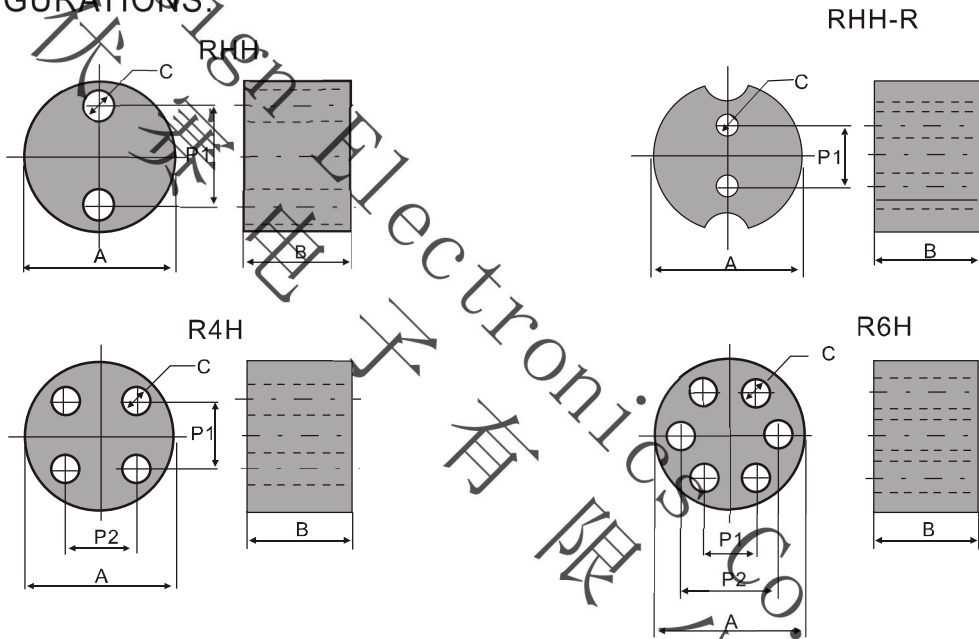

DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

Ordering code	A	B	C	P ₁	P ₂
RHH 6×12×1.0	6.0±0.3	12.0±0.5	1.0±0.15	2.9±0.15	
RHH 6.5×5.5×1.2R	6.5±0.3	5.5±.03	1.2±0.15	3.0±0.15	
RHH 7×5.5×1.5R	7.0±0.4	5.5±0.3	1.5±0.15	3.0±0.15	
RHH 7×6×1.5	7.0±0.4	6.0±.03	1.5±0.15	2.7±0.15	
R4H 6.7×7×1.3	6.7±0.4	7.0±0.3	1.3±0.15	3.6±0.15	3.6±0.15
R4H 8×5×1.2	8.0±0.4	5.0±0.3	1.2±0.15	3.0±0.15	3.0±0.15
R6H 6×10×0.9	6.0±0.3	10.0±0.5	0.9±0.15	2.35±0.15	3.25±0.15

“B”对在合理范围内可调。

Fusign Electronics Co., Ltd

Email: robinson@fusigntronics.com