

RI


<http://www.fusigntronics.com>

型磁芯 (CORE RI TYPE)

用途：汽车音响调节器。

APPLICATIONS: CAR-RADIO TUNER.

ORDERING CODE:

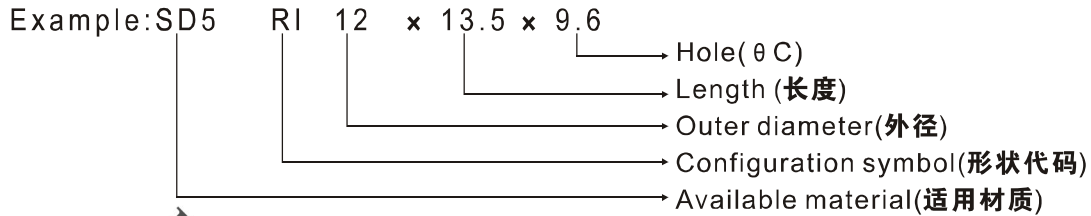

CONFIGURATIONS:



DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

CORES	A	B	C	D	E
RI 3.3×8×2.5	3.3±0.1		2.5±0.15	8.0±0.3	
RI 4.5×2.2×3.6	4.5±0.1		3.6 ^{+0.05} _{-0.1}	2.2±0.1	
RI 4×9.85×3.1	4.0±0.1		3.1±0.1	9.85±0.4	
RI 7.8×4×6.4	7.8±0.3		6.4±0.2	4.0±0.2	
RI 12×13.5×9.6	12±0.5		9.6±0.15	13.5±0.5	
RI 16×8×12	16±0.2		12±0.2	8.0±0.3	
RI 8.8×6.5×6.07(S)	8.8±0.2	7.0±0.15	6.07±0.15	6.5±0.3	3.5±0.2
RI 12.4×4.2×10.1(S)	12.4±0.3	10.16 ^{+0.1} _{-0.2}	9.35 ^{+0.05} _{-0.1}	4.2±0.2	2.0±0.2

DRI


型磁芯 USE FOR ALARM (CORE DRI TYPE)

DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

Ordering code	DR	RI (combination with DR)
DRI 3.3×2T	DR 2.5×2	RI 3.3×2×2.5T
DRI 3.3×2.6T	DR 2.5×2.6	RI 3.3×2.6×2.5T
DRI 4.5×2T	DR 3.55×2	RI 4.5×2×3.6T
DRI 4.5×2.5T	DR 3.55×2.5	RI 4.5×2.5×3.6T
DRI 4.9×3T	DR 4×3(3.85×3)	RI 4.9×3×3.9T
DRI 3.3×1.7T	DR 2.5×1.7	RI 3.3×1.7×2.5T
DRI 4.5×2.2T	DR 3.6×2.2	RI 4.5×2.2×3.6T
DRI 4.5×2.5T	DR 3.6×2.5	RI 4.5×2.5×3.6T

CONFIGURATIONS:

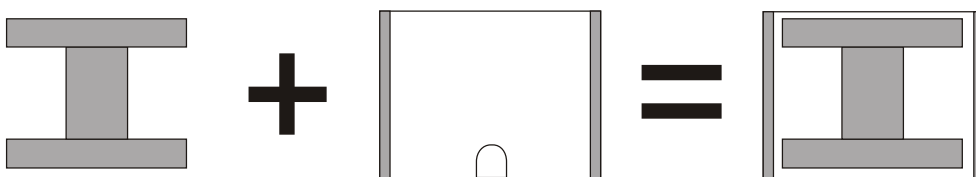

Fusign Electronics Co., Ltd

Email: robinson@fusigntronics.com