


IRON POWDER CORE SERIES PRODUCTS


Toroidal Cores

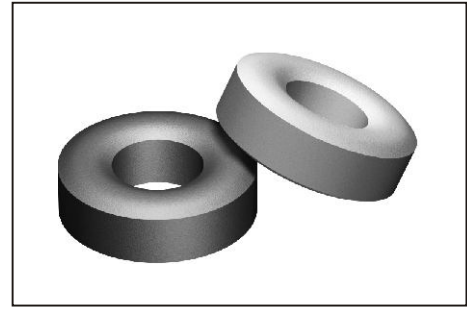


STANDARD SPECIFICATIONS

Part Number	A_L mH/N ²	OD mm	ID mm	HT mm	Le cm	Ae cm ²	V cm ³
KT72-8	36.0	18.3	7.11	6.60	4.01	.349	1.40
KT72-8/93	36.0	18.3	7.11	6.60	4.01	.349	1.40
KT72-18	60.0	18.3	7.11	6.60	4.01	.349	1.40
KT72-26	90.0	18.3	7.11	6.60	4.01	.349	1.40
KT72-40	71.0	18.3	7.11	6.60	4.01	.349	1.40
KT72-52	82.0	18.3	7.11	6.60	4.01	.349	1.40
KT80-1	11.5	20.2	12.6	6.35	5.14	.231	1.19
KT80-2	5.5	20.2	12.6	6.35	5.14	.231	1.19
KT80-2/93	5.5	20.2	12.6	6.35	5.14	.231	1.19
KT80-3	18.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-6	4.5	20.2	12.6	6.35	5.14	.231	1.19
KT80-7	5.5	20.2	12.6	6.35	5.14	.231	1.19
KT80-8	18.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-8/93	18.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-10	3.2	20.2	12.6	6.35	5.14	.231	1.19
KT80-15	17.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-18	31.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-26	46.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-38	48.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-40	39.5	20.2	12.6	6.35	5.14	.231	1.19
KT80-45	56.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-52	42.0	20.2	12.6	6.35	5.14	.231	1.19
KT80-8B	29.5	20.2	12.6	9.53	5.14	.347	1.78
KT80-8B/93	29.5	20.2	12.6	9.53	5.14	.347	1.78
KT80-18B	46.5	20.2	12.6	9.53	5.14	.347	1.78

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



TYPICAL PART No.

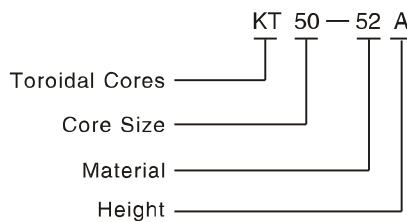

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume