


IRON POWDER CORE SERIES PRODUCTS

# Toroidal Cores


## STANDARD SPECIFICATIONS

Part Number	$A_L$ $\mu H/N^2$	OD mm	ID mm	HT mm	Le cm	Ae cm <sup>2</sup>	V cm <sup>3</sup>
KT157-28	31.5	39.9	24.1	14.5	10.1	1.06	10.7
KT157-33	43.5	39.9	24.1	14.5	10.1	1.06	10.7
KT157-38	112.0	39.9	24.1	14.5	10.1	1.06	10.7
KT157-40	86.0	39.9	24.1	14.5	10.1	1.06	10.7
KT157-45	130.0	39.9	24.1	14.5	10.1	1.06	10.7
KT157-52	99.0	39.9	24.1	14.5	10.1	1.06	10.7
KT175-2	15.0	44.5	27.2	16.5	11.2	1.34	15.0
KT175-6	12.5	44.5	27.2	16.5	11.2	1.34	15.0
KT175-18	82.0	44.5	27.2	16.5	11.2	1.34	15.0
KT175-26	105.0	44.5	27.2	16.5	11.2	1.34	15.0
KT175-40	90.0	44.5	27.2	16.5	11.2	1.34	15.0
KT175-52	105.0	44.5	27.2	16.5	11.2	1.34	15.0
KT184-1	50.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-2	24.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-2/93	24.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-3	72.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-6	19.5	46.7	24.1	18.0	11.2	1.88	21.0
KT184-8	72.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-8/93	72.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-18	116.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-26	169.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-28	51.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-33	70.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-40	143.0	46.7	24.1	18.0	11.2	1.88	21.0
KT184-52	159.0	46.7	24.1	18.0	11.2	1.88	21.0
KT200-1	25.0	50.8	31.8	14.0	13.0	1.27	16.4

## TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



### TYPICAL PART No.

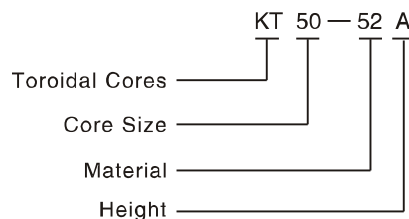

Le: Mean Magnetic Path Length  
 Ae: Cross Section Area  
 Ve: Core Volume