


IRON POWDER CORE SERIES PRODUCTS

Toroidal Cores


STANDARD SPECIFICATIONS

Part Number	A_L $\mu H/N^2$	OD mm	ID mm	HT mm	Le cm	Ae cm ²	V cm ³
KT225-2	12.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-2/93	12.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-3	42.5	57.2	35.7	14.0	14.6	1.42	20.7
KT225-6	10.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-8	42.5	57.2	35.7	14.0	14.6	1.42	20.7
KT225-8/93	42.5	57.2	35.7	14.0	14.6	1.42	20.7
KT225-18	67.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-26	98.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-28	28.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-33	37.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-40	78.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-52	92.0	57.2	35.7	14.0	14.6	1.42	20.7
KT225-2B	21.5	57.2	35.7	25.4	14.6	2.59	37.8
KT225-26B	160.0	57.2	35.7	25.4	14.6	2.59	37.8
KT225-52B	155.0	57.2	35.7	25.4	14.6	2.59	37.8
KT249-26	203.0	63.5	35.7	25.4	15.6	3.36	52.3
KT249-52	203.0	63.5	35.7	25.4	15.6	3.36	52.3
KT250-18	177.0	63.5	31.8	25.4	15.0	3.84	57.4
KT250-26	242.0	63.5	31.8	25.4	15.0	3.84	57.4
KT250-40	194.0	63.5	31.8	25.4	15.0	3.84	57.4
KT250-52	242.0	63.5	31.8	25.4	15.0	3.84	57.4
KT300-2	11.4	77.2	49.0	12.7	19.8	1.68	33.4
KT300-2/93	11.4	77.2	49.0	12.7	19.8	1.68	33.4
KT300-8	37.0	77.2	49.0	12.7	19.8	1.68	33.4
KT300-8/93	37.0	77.2	49.0	12.7	19.8	1.68	33.4
KT300-18	58.0	77.2	49.0	12.7	19.8	1.68	33.4

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



TYPICAL PART No.

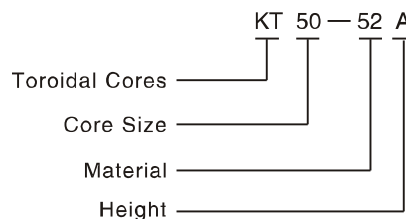

Le: Mean Magnetic Path Length

Ae: Cross Section Area

Ve: Core Volume