


IRON POWDER CORE SERIES PRODUCTS


E Type Cores

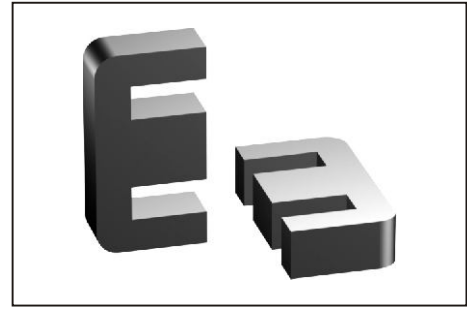


STANDARD SPECIFICATIONS

Part Number	A_L nH/N ²	A mm	B mm	C mm	D mm	F mm	G mm	Le cm	Ae cm ²	V cm ³	W cm ²
KE25-52A	85.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
KE26-2	53.0	25.9	19.1	14.1	8.89	6.35	19.4	3.93	.895	2.36	.581
KE26-8	116.0	25.9	19.1	14.1	8.89	6.35	19.4	3.93	.895	2.36	.581
KE30-26	90.0	30.1	30.1	7.06	19.9	7.06	19.9	7.14	.498	4.60	1.27
KE30-40	86.0	30.1	30.1	7.06	19.9	7.06	19.9	7.14	.498	4.60	1.27
KE30-52	90.0	30.1	30.1	7.06	19.9	7.06	19.9	7.14	.498	4.60	1.27
KE32-26	134.0	31.8	30.8	9.60	21.2	9.60	22.5	7.45	.922	6.82	1.37
KE32-33	63.5	31.8	30.8	9.60	21.2	9.60	22.5	7.45	.922	6.82	1.37
KE32-40	113.0	31.8	30.8	9.60	21.2	9.60	22.5	7.45	.922	6.82	1.37
KE35-2	32.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE35-8	67.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE35-18	100.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE35-26	134.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE35-28	50.5	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE35-40	113.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE35-52	131.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
KE37-18	112.0	37.0	34.8	10.8	24.1	10.8	26.3	8.50	1.17	9.89	1.84
KE37-26	146.0	37.0	34.8	10.8	24.1	10.8	26.3	8.50	1.17	9.89	1.84
KE37-52	146.0	37.0	34.8	10.8	24.1	10.8	26.3	8.50	1.17	9.89	1.84
KE41-8	105.0	41.3	34.1	12.7	21.4	12.7	28.6	8.41	1.61	13.6	1.70
KE41-18	149.0	41.3	34.1	12.7	21.4	12.7	28.6	8.41	1.61	13.6	1.70
KE41-26	210.0	41.3	34.1	12.7	21.4	12.7	28.6	8.41	1.61	13.6	1.70
KE41-28	78.0	41.3	34.1	12.7	21.4	12.7	28.6	8.41	1.61	13.6	1.70
KE41-40	175.0	41.3	34.1	12.7	21.4	12.7	28.6	8.41	1.61	13.6	1.70
KE41-52	199.0	41.3	34.1	12.7	21.4	12.7	28.6	8.41	1.61	13.6	1.70
KE43-2	43.5	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS

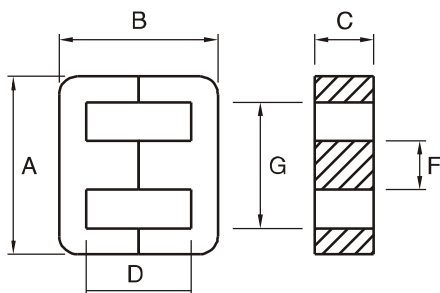

TYPICAL PART No.

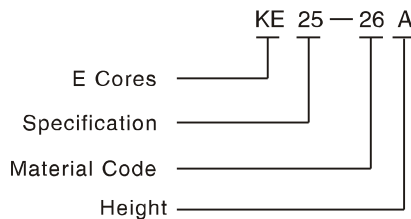

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume