


IRON POWDER CORE SERIES PRODUCTS

E Type Cores


STANDARD SPECIFICATIONS

Part Number	A_L nH/N ²	A mm	B mm	C mm	D mm	F mm	G mm	Le cm	Ae cm ²	V cm ³	W cm ²
KE43-8	97.0	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87
KE43-18	135.0	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87
KE43-26	195.0	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87
KE43-28	73.0	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87
KE43-40	163.0	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87
KE43-52	179.0	42.8	42.2	15.0	30.7	12.0	30.7	10.4	1.81	18.5	2.87
KE43-2A	55.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-8A	116.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-18A	170.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-26A	232.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-28A	85.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-33A	110.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-40A	196.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE43-52A	230.0	42.8	42.2	20.0	30.7	12.0	30.7	10.4	2.41	24.6	2.87
KE47-8	144.0	47.4	39.4	15.7	24.2	15.7	31.8	9.53	2.48	23.3	1.93
KE47-18	213.0	47.4	39.4	15.7	24.2	15.7	31.8	9.53	2.48	23.3	1.93
KE47-26	265.0	47.4	39.4	15.7	24.2	15.7	31.8	9.53	2.48	23.3	1.93
KE47-28	115.0	47.4	39.4	15.7	24.2	15.7	31.8	9.53	2.48	23.3	1.93
KE47-40	240.0	47.4	39.4	15.7	24.2	15.7	31.8	9.53	2.48	23.3	1.93
KE47-52	265.0	47.4	39.4	15.7	24.2	15.7	31.8	9.53	2.48	23.3	1.93
KE56-2	69.0	56.1	55.4	20.8	38.3	17.3	38.6	13.2	3.60	47.7	4.09
KE56-8	143.0	56.1	55.4	20.8	38.3	17.3	38.6	13.2	3.60	47.7	4.09
KE56-18	196.0	56.1	55.4	20.8	38.3	17.3	38.6	13.2	3.60	47.7	4.09
KE56-26	275.0	56.1	55.4	20.8	38.3	17.3	38.6	13.2	3.60	47.7	4.09
KE56-28	107.0	56.1	55.4	20.8	38.3	17.3	38.6	13.2	3.60	47.7	4.09
KE56-33	136.0	56.1	55.4	20.8	38.3	17.3	38.6	13.2	3.60	47.7	4.09

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS

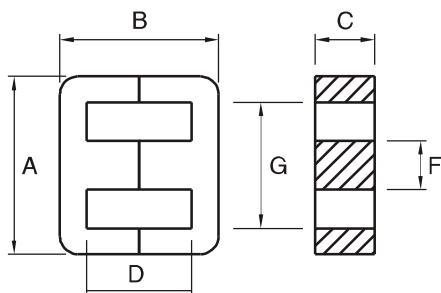

TYPICAL PART No.

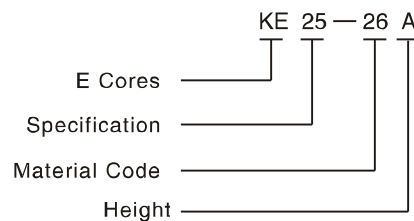

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume