


## ALLOY POWDER CORE SERIES PRODUCTS

# Toroidal Cores


TYPICAL PART No.

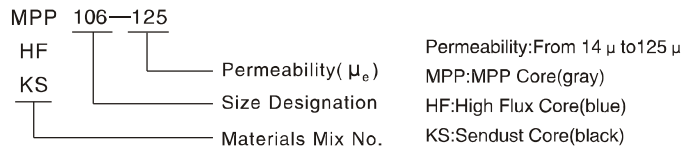

### STANDARD SPECIFICATIONS

Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX	$A_L$ nH/N <sup>2</sup>	Dimensions (Bare)			Dimensions (Coated)			L cm	A cm <sup>2</sup>	V cm <sup>3</sup>
		OD mm	ID mm	HT mm	OD mm(Max)	ID mm(Min)	HT mm(Max)			
141-26	24	35.80	22.40	10.50	36.63	21.54	11.28	0.678	6.088	3.640
141-35	33	35.80	22.40	10.50	36.63	21.54	11.28	0.678	6.088	3.640
141-60	56	35.80	22.40	10.50	36.63	21.54	11.28	0.678	6.088	3.640
141-75	70	35.80	22.40	10.50	36.63	21.54	11.28	0.678	6.088	3.640
141-90	84	35.80	22.40	10.50	36.63	21.54	11.28	0.678	6.088	3.640
141-125	117	35.80	22.40	10.50	36.63	21.54	11.28	0.678	6.088	3.640
157-26	35	39.90	24.10	14.50	40.72	23.30	15.37	9.840	1.072	10.500
157-35	48	39.90	24.10	14.50	40.72	23.30	15.37	9.840	1.072	10.500
157-60	81	39.90	24.10	14.50	40.72	23.30	15.37	9.840	1.072	10.500
157-75	101	39.90	24.10	14.50	40.72	23.30	15.37	9.840	1.072	10.500
157-90	121	39.90	24.10	14.50	40.72	23.30	15.37	9.840	1.072	10.500
157-125	168	39.90	24.10	14.50	40.72	23.30	15.37	9.840	1.072	10.500
168-26	47	42.90	24.20	16.26	44.00	23.30	17.16	10.261	1.475	15.741
168-35	63	42.90	24.20	16.26	44.00	23.30	17.16	10.261	1.475	15.741
168-60	108	42.90	24.20	16.26	44.00	23.30	17.16	10.261	1.475	15.741
168-75	135	42.90	24.20	16.26	44.00	23.30	17.16	10.261	1.475	15.741
168-90	161	42.90	24.20	16.26	44.00	23.30	17.16	10.261	1.475	15.741
168-125	224	42.90	24.20	16.26	44.00	23.30	17.16	10.261	1.475	15.741
184-26	59	46.70	24.10	18.00	47.63	23.32	18.92	10.740	1.990	21.300
184-35	80	46.70	24.10	18.00	47.63	23.32	18.92	10.740	1.990	21.300
184-60	135	46.70	24.10	18.00	47.63	23.32	18.92	10.740	1.990	21.300
184-75	169	46.70	24.10	18.00	47.63	23.32	18.92	10.740	1.990	21.300
184-90	202	46.70	24.10	18.00	47.63	23.32	18.92	10.740	1.990	21.300
184-125	281	46.70	24.10	18.00	47.63	23.32	18.92	10.740	1.990	21.300

### TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



$L_e$ : Mean Magnetic Path length

$A_e$ : Cross Section Area

$V_e$ : Core Volume

Operating temperature range:  $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

$A_L$  Test condition: 10kHz, 1mT