


IRON POWDER CORE SERIES PRODUCTS


Toroidal Cores

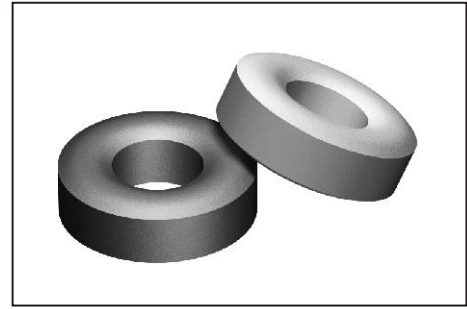


STANDARD SPECIFICATIONS

Part Number	A_L nH/N ²	OD mm	ID mm	HT mm	Le cm	Ae cm ²	V cm ³
KT25-1	7.0	6.48	3.05	2.44	1.50	.037	.055
KT25-2	3.4	6.48	3.05	2.44	1.50	.037	.055
KT25-2/93	3.4	6.48	3.05	2.44	1.50	.037	.055
KT25-3	10.0	6.48	3.05	2.44	1.50	.037	.055
KT25-6	2.7	6.48	3.05	2.44	1.50	.037	.055
KT25-7	2.9	6.48	3.05	2.44	1.50	.037	.055
KT25-8	10.0	6.48	3.05	2.44	1.50	.037	.055
KT25-8/93	10.0	6.48	3.05	2.44	1.50	.037	.055
KT25-10	1.9	6.48	3.05	2.44	1.50	.037	.055
KT25-15	8.5	6.48	3.05	2.44	1.50	.037	.055
KT25-18	17.0	6.48	3.05	2.44	1.50	.037	.055
KT25-26	24.5	6.48	3.05	2.44	1.50	.037	.055
KT25-40	20.5	6.48	3.05	2.44	1.50	.037	.055
KT25-45	31.0	6.48	3.05	2.44	1.50	.037	.055
KT25-52	23.0	6.48	3.05	2.44	1.50	.037	.055
KT26-8	24.0	6.73	2.67	4.83	1.47	.090	.133
KT26-18	41.5	6.73	2.67	4.83	1.47	.090	1.33
KT26-26	57.0	6.73	2.67	4.83	1.47	.090	1.33
KT26-45	77.0	6.73	2.67	4.83	1.47	.090	1.33
KT26-52	56.0	6.73	2.67	4.83	1.47	.090	1.33
KT30-1	8.5	7.8	3.84	3.25	1.84	.060	.110
KT30-2	4.3	7.80	3.84	3.25	1.84	.060	.110
KT30-2/93	4.3	7.80	3.84	3.25	1.84	.060	.110
KT30-3	14.0	7.8	3.84	3.25	1.84	.060	.110
KT30-6	3.6	7.8	3.84	3.25	1.84	.060	.110
KT30-7	3.7	7.8	3.84	3.25	1.84	.060	.110

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



TYPICAL PART No.

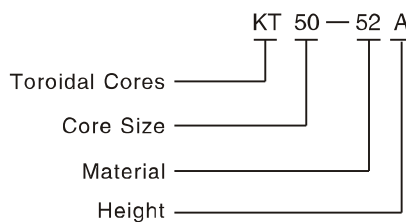

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume