


# SURFACE-MOUNT WOUND MOLDED CHIP INDUCTORS

## AIMS-1008 SERIES

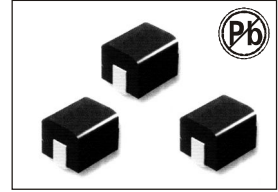

### FEATURES:

- Molded construction
- Heat Resistant Molded Resin
- Excellent Mechanical Strength
- Excellent Solderability
- High Reliability
- Low Profile
- Lead free are RoHS complaint

### OPTIONS:

- Packaging:Tape & Reel is standard (Qty:2000pcs)
- Bulk packaging available for smaller quantities
- Tolerance:10% and 5% is standard, tighter tolerances available

### COMMON APPLICATIONS:

- VCRs DC/DC Converts
- Video Cameras CTV, VCR HIC
- Communication System
- Automotive Systems
- LCD/PDP Televisions
- Hard Disk Drives
- Network Systems
- Computer Peripheral Equipment


### ELECTRICAL CHARACTERISTICS:

Part Number	L $\mu$ H	Tol %	Q Min	SRF MHz Min	DCR $\Omega$ Max	IDC Max mA	Test Freq MHz	Part Number	L $\mu$ H	Tol %	Q Min	SRF MHz Min	DCR $\Omega$ Max	IDC Max mA	Test Freq MHz
AIMS-1008-R010K	.010	$\pm 10$	10	2150	0.26	530	100	AIMS-1008-1R2J	1.2	$\pm 5$	30	180	1.20	230	7.96
AIMS-1008-R012K	.012	$\pm 10$	15	2050	0.27	500	100	AIMS-1008-1R5J	1.5	$\pm 5$	30	135	1.30	200	7.96
AIMS-1008-R015K	.015	$\pm 10$	15	1850	0.31	480	100	AIMS-1008-1R8J	1.8	$\pm 5$	30	100	1.45	210	7.96
AIMS-1008-R018K	.018	$\pm 10$	15	1650	0.34	450	100	AIMS-1008-2R2J	2.2	$\pm 5$	30	75	1.55	200	7.96
AIMS-1008-R022K	.022	$\pm 10$	15	1550	0.38	420	100	AIMS-1008-2R7J	2.7	$\pm 5$	30	55	1.70	195	7.96
AIMS-1008-R027K	.027	$\pm 10$	15	1400	0.42	400	100	AIMS-1008-3R3J	3.3	$\pm 5$	30	48	1.90	185	7.96
AIMS-1008-R033K	.033	$\pm 10$	15	1250	0.46	400	100	AIMS-1008-3R9J	3.9	$\pm 5$	30	43	2.10	180	7.96
AIMS-1008-R039K	.039	$\pm 10$	20	1100	0.50	380	100	AIMS-1008-4R7J	4.7	$\pm 5$	30	40	2.30	175	7.96
AIMS-1008-R047K	0.47	$\pm 10$	20	1050	0.56	360	100	AIMS-1008-5R6J	5.6	$\pm 5$	25	36	2.50	170	7.96
AIMS-1008-R056K	0.56	$\pm 10$	20	950	0.65	340	100	AIMS-1008-6R8J	6.8	$\pm 5$	25	33	2.70	165	7.96
AIMS-1008-R068K	0.68	$\pm 10$	20	900	0.70	320	100	AIMS-1008-8R2J	8.2	$\pm 5$	25	30	3.05	160	7.96
AIMS-1008-R082K	0.82	$\pm 10$	20	850	0.75	300	100	AIMS-1008-100J	10	$\pm 5$	25	27	3.50	155	2.52
AIMS-1008-R10K	.10	$\pm 10$	20	700	0.80	280	100	AIMS-1008-120J	12	$\pm 5$	25	23	3.80	150	2.52
AIMS-1008-R12K	.12	$\pm 10$	30	600	0.37	520	25.2	AIMS-1008-150J	15	$\pm 5$	25	20	4.40	140	2.52
AIMS-1008-R15K	.15	$\pm 10$	30	550	0.42	480	25.2	AIMS-1008-180J	18	$\pm 5$	25	18	4.80	130	2.52
AIMS-1008-R18K	.18	$\pm 10$	30	500	0.46	460	25.2	AIMS-1008-220J	22	$\pm 5$	25	17	5.50	125	2.52
AIMS-1008-R22K	.22	$\pm 10$	30	450	0.52	430	25.2	AIMS-1008-270J	27	$\pm 5$	25	16	6.30	115	2.52
AIMS-1008-R27K	.27	$\pm 10$	30	425	0.56	420	25.2	AIMS-1008-330J	33	$\pm 5$	20	15	7.10	110	2.52
AIMS-1008-R33K	.33	$\pm 10$	30	400	0.60	400	25.2	AIMS-1008-390J	39	$\pm 5$	20	14	9.50	90	2.52
AIMS-1008-R39K	.39	$\pm 10$	30	375	0.65	375	25.2	AIMS-1008-470J	47	$\pm 5$	20	13	11.10	80	2.25
AIMS-1008-R47K	.47	$\pm 10$	30	350	0.68	350	25.2	AIMS-1008-560J	56	$\pm 5$	20	12	12.10	75	2.52
AIMS-1008-R56K	.56	$\pm 10$	30	300	0.75	325	25.2	AIMS-1008-680J	68	$\pm 5$	20	11	16.60	70	2.52
AIMS-1008-R68K	.68	$\pm 10$	30	270	0.85	300	25.2	AIMS-1008-820J	82	$\pm 5$	20	10	19.00	65	2.52
AIMS-1008-R82K	.82	$\pm 10$	30	250	1.00	260	25.2	AIMS-1008-101J	100	$\pm 5$	15	9	21.00	60	0.796
AIMS-1008-1R0J	1.00	$\pm 5$	30	220	1.10	245	7.96								

### TECHNICAL INFORMATION:

- Testing: (Equivalent acceptable)
- Q: .010  $\mu$ H to .10  $\mu$ H--HP4291A
- .12  $\mu$ H to 100  $\mu$ H--HP4285A
- SRF: .010  $\mu$ H to .10  $\mu$ H--HP8720B
- .12  $\mu$ H to 100  $\mu$ H--HP4191A
- RDC: QuadTech 1880 Milliohm meter
- Inductance:.010  $\mu$ H to .10  $\mu$ H--HP4291A: .12  $\mu$ H to 100  $\mu$ H--HP4285A
- Solderability:90% Terminal coverage Preheat @ 230 $^{\circ}$ C  $\pm$  5 $^{\circ}$ C for 5  $\pm$  .5 seconds
- Flux: Methanol solution with 25% colophony
- IDC:The maximum DC value having L decrease within 10% and Temperature Increase only 20 $^{\circ}$ C with the application of DC bias
- Operating Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
- Storage Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

### PHYSICAL CHARACTERISTICS:

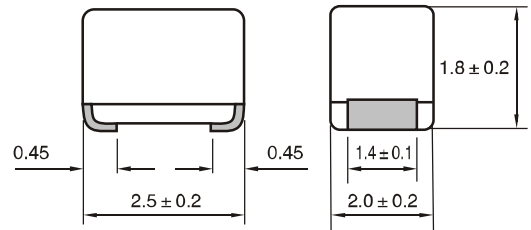

Dimensions: mm