

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH6D28-6D38 SERIES

FEATURES:

- Magnetically Shielded Structure
- Low DC Resistance
- Large current up to 3.2A
- Excellent Mechanical Strength
- High Reliability and Excellent Solderability
- Low and square Profile
- High heat resistance

OPTIONS:

- Packaging: Tape & Reel is standard (Qty:2000pcs)
Bulk packaging available for smaller quantities
- Tolerance: 10% and 5% is standard, tighter tolerances available

COMMON APPLICATIONS:


- VCRs, Notebook, DC/DC Converters
- Video Digital Cameras
- Communication System
- Automotive Systems Power supplier
- LCD PDP Televisions
- Hard Disk Drives, Topset, XDSL
- Network Systems
- Computer Peripheral Equipment

ELECTRICAL CHARACTERISTICS:

Part Number	L μ H	Test Freq KHz	DCR m Ω Max	IDC Max A	Part Number	L μ H	Test Freq KHz	DCR m Ω Max	IDC Max A
SDRH6D28-3R0N	3.0	10	24	3.00	SDRH6D38-3R3N	3.3	10	20	3.20
SDRH6D28-3R9N	3.9	10	27	2.60	SDRH6D38-5R0N	5.0	10	24	2.60
SDRH6D28-5R0N	5.0	10	31	2.40	SDRH6D38-6R2N	6.2	10	27	2.30
SDRH6D28-6R0N	6.0	10	35	2.25	SDRH6D38-7R4N	7.4	10	31	2.10
SDRH6D28-7R3N	7.3	10	41	2.10	SDRH6D38-8R7N	8.7	10	34	2.00
SDRH6D28-8R6N	8.6	10	58	1.85	SDRH6D38-100N	10	10	44	1.80
SDRH6D28-100N	10	10	65	1.70	SDRH6D38-120N	12	10	53	1.70
SDRH6D28-120N	12	10	70	1.55	SDRH6D38-150N	15	10	57	1.45
SDRH6D28-150N	15	10	84	1.40	SDRH6D38-180N	18	10	92	1.40
SDRH6D28-180N	18	10	95	1.32	SDRH6D38-220N	22	10	96	1.20
SDRH6D28-220N	22	10	128	1.20	SDRH6D38-270N	27	10	109	1.10
SDRH6D28-270N	27	10	142	1.05	SDRH6D38-330N	33	10	124	1.00
SDRH6D28-330N	33	10	165	0.97	SDRH6D38-390N	39	10	138	0.95
SDRH6D28-390N	39	10	210	0.86	SDRH6D38-470N	47	10	155	0.85
SDRH6D28-470N	47	10	238	0.80	SDRH6D38-560N	56	10	202	0.75
SDRH6D28-560N	56	10	277	0.73	SDRH6D38-680N	68	10	234	0.70
SDRH6D28-680N	68	10	304	0.65	SDRH6D38-820N	82	10	324	0.62
SDRH6D28-820N	82	10	390	0.60	SDRH6D38-101N	100	10	358	0.58
SDRH6D28-101N	100	10	535	0.54					

Note: 1. K= \pm 10%, M= \pm 20%, N= \pm 30%

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:

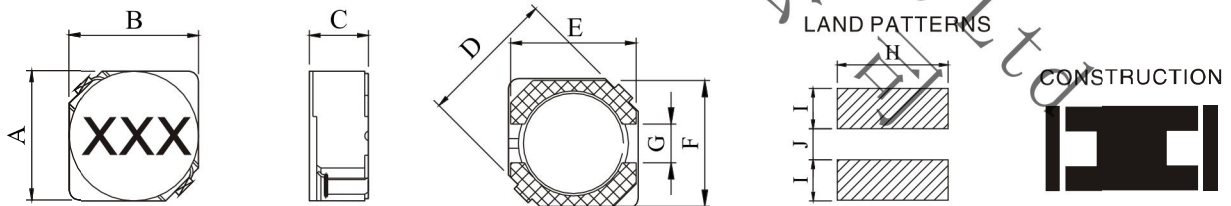

- Inductor Testing: HP4284A (Equivalent acceptable)
 - DCR: QuadTech 1880 Milliohm meter
 - Q- HP4342A - SRF-HP4191A
 - IDC Max current is decreased 10% against its initial value
 - Operating temperature: -40°C to +105°C
 - Storage Temperature: -40°C to +105°C
 - Solder methods: Vapor Phase, Infrared Reflow
 - Resistance to soldering heat: 260°C for 10 seconds
 - Solvent resistance: Conforms to MIL-STD-202E
 - Marking: Inductance & Tolerance
- Note: All specifications subject to change without notice.

DIMENSIONS IN: mm

Part number	A	B	C	D	E	F	G	H	I	J
SDRH6D28	7.0Max	7.0Max	3.2Max	9.5Max	6.5	6.5	2.0	7.3	2.65	2.0
SDRH6D38	7.0Max	7.0Max	4.2Max	9.5Max	6.5	6.5	2.0	7.3	2.65	2.0