



SB Series: High Current Inductors

SB 06 Series

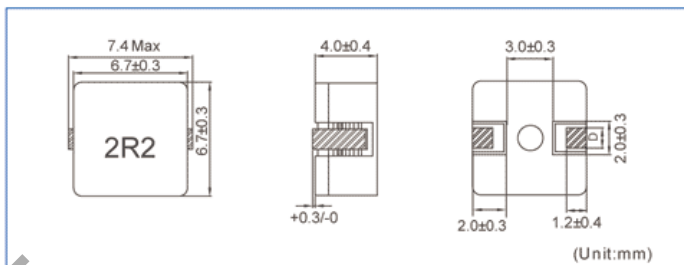

电气性能 Electrical characteristics

SB 0640

产品编号 Part No.	测试条件 Test Condition	电感值 Inductance L(uH) ± 20%	直流电阻(mΩ) DC Resistance Max	温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A)Max	尺寸(单位: mm) Dimensions(unit:mm)
						D:Ref
SB 0640-R33M	100KHz/1.0V	0.33	2.5	22.0	20.0	1.2
SB 0640-R47M	100KHz/1.0V	0.47	2.5	19.0	17.0	1.2
SB 0640-R68M	100KHz/1.0V	0.68	4.0	17.0	16.0	1.2
SB 0640-R82M	100KHz/1.0V	0.82	5.5	16.0	14.0	1.2
SB 0640-1R0M	100KHz/1.0V	1.0	8.0	15.0	12.0	1.2
SB 0640-1R5M	100KHz/1.0V	1.5	9.0	12.0	10.0	1.2
SB 0640-2R2M	100KHz/1.0V	2.2	13.0	10.0	7.0	1.2
SB 0640-3R3M	100KHz/1.0V	3.3	25.0	7.0	6.0	1.2
SB 0640-4R7M	100KHz/1.0V	4.7	32.0	6.0	5.0	1.2

直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

SB 0640

