


SB Series: High Current Inductors

SB 10 Series

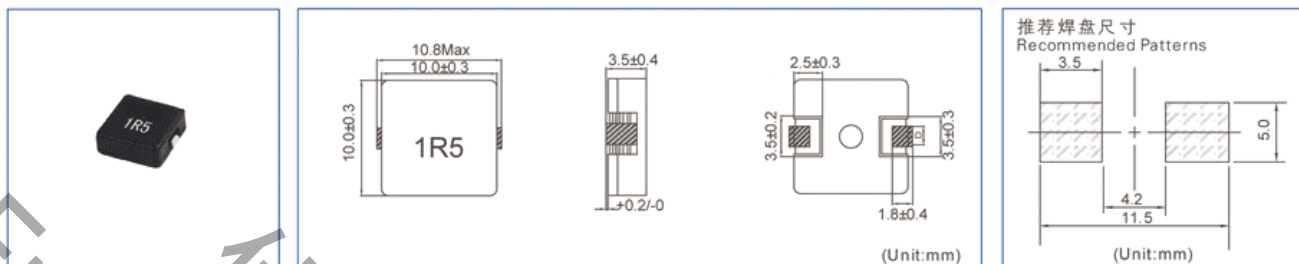

电气性能 Electrical characteristics

SB 1035

产品编号 Part No.	测试条件 Test Condition	电感值 Inductance L(uH) ± 20%	直流电阻(mΩ) DC Resistance Max	温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A)Max	尺寸 (单位: mm) Dimensions(unit:mm)
						D:Ref
SB1035-R33M	100KHz/1.0V	0.33	2.0	16.0	20.0	1.8
SB1035-R60M	100KHz/1.0V	0.6	3.5	14.0	18.0	1.8
SB1035-1R0M	100KHz/1.0V	1.0	5.5	12.0	16.0	1.8
SB1035-1R5M	100KHz/1.0V	1.5	8.0	10.0	14.0	1.8
SB1035-2R0M	100KHz/1.0V	2.0	12.0	9.0	13.0	1.8
SB1035-2R7M	100KHz/1.0V	2.7	18.0	8.0	12.0	1.8
SB1035-3R3M	100KHz/1.0V	3.3	25.0	7.0	11.0	1.8

直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

SB 1035

