
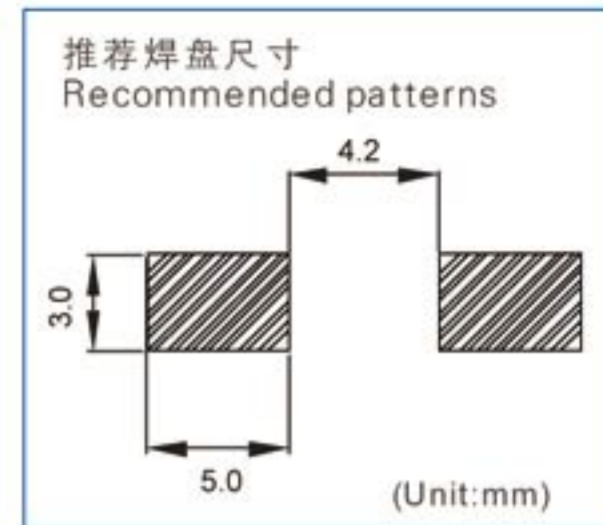


## SC Series: High Current Inductors

### SCE 25 Series

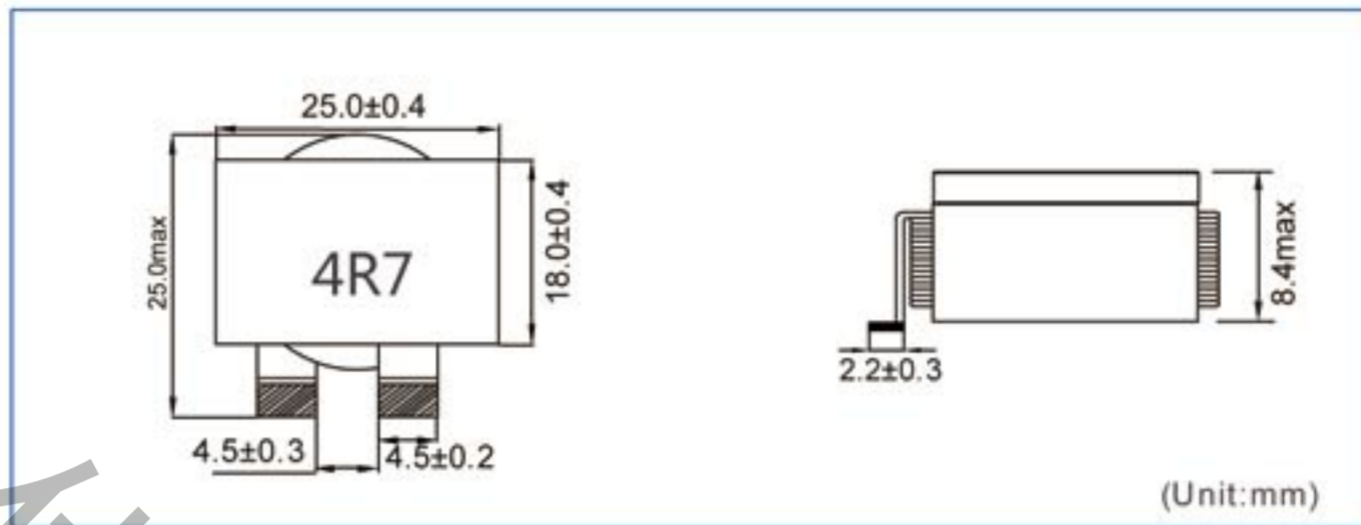

## 电气性能 Electrical characteristics

### SCE 2580

产品编号 Part No.	测试条件 Test Condition	电感值 Inductance L(uH) ± 20%	直流电阻(mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A)Max
			Typical	Max		
SCE2580-3R3M	100KHz/1.0V	3.30	1.80	2.20	26.0	31.0
SCE2580-4R7M	100KHz/1.0V	4.70	2.70	3.20	24.0	28.0
SCE2580-6R8M	100KHz/1.0V	6.80	3.20	3.80	23.0	23.0
SCE2580-8R2M	100KHz/1.0V	8.20	3.20	3.80	23.0	19.5
SCE2580-100M	100KHz/1.0V	10.00	5.00	6.00	19.0	18.0
SCE2580-150M	100KHz/1.0V	15.00	5.00	6.00	19.0	12.0
SCE2580-220M	100KHz/1.0V	22.00	5.00	6.00	19.0	8.0
SCE2580-330M	100KHz/1.0V	33.00	5.70	6.80	17.0	6.0
SCE2580-470M	100KHz/1.0V	47.00	5.70	6.80	17.0	4.0
SCE2580-560M	100KHz/1.0V	56.00	5.70	6.80	17.0	3.0

## 直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

### SCE 2580

