
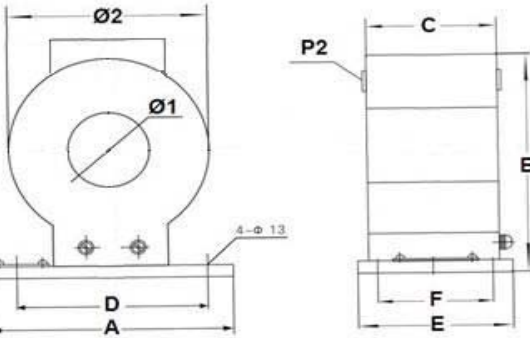


LMZJ1 Series


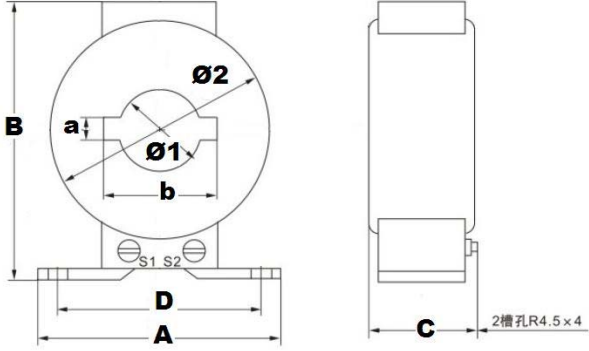
Mfg P/N	Input/Output (A)	Burden(VA)/Class			Product Description
		0.2	0.5	1.0	
LMZJ1-30	100/5	---	---	1.5	 
	150/5	---	1.5	2.5	
	200/5	---	1.5	2.5	
	250/5	1.5	5	3.75	
	400/5	2.5	5	10	
LMZJ1-35	250/5	1.5	2.5	5	
	300/5	2.5	3.75	10	
	400/5	2.5	5	10	
	500/5	2.5	5	15	
	600/5	5	10	25	
LMZJ1-46	250/5	1.5	2.5	5	
	400/5	2.5	3.75	10	
	500/5	2.5	5	10	
	800/5	2.5	5	15	
	1000/5	5	10	25	
LMZJ1-55	500/5	2.5	10	20	
	600/5	2.5	15	25	
	800/5	2.5	15	25	
	1000/5	5	20	25	
	1500/5	7.5	30	45	
LMZJ1-75	800/5	3.75	5	20	
	1000/5	5	10	25	
	2000/5	7.5	30	45	
	2500/5	10	30	45	
	3000/5	15	30	45	
LMZJ1-20/65	50/5	5	10	15	
	75/5	10	15	20	
	100/5	10	15	20	
	200/5	15	20	30	
LMZJ1-30/52	50/5	5	10	15	
	75/5	5	15	20	
	100/5	10	15	20	
	200/5	15	20	30	
	400/5	15	20	30	
LMZJ1-30/90	50/5	15	20	25	
	75/5	15	20	25	
	100/5	15	20	25	
	200/5	20	25	30	
	400/5	20	25	30	

Type	Ø1	Ø2	A	B	C	D	E	F
LMZJ1-30	30	89	110	115	46	85	47	35
LMZJ1-35	35	91	110	117	46	85	47	35
LMZJ1-46	46	93	110	120	46	85	47	35
LMZJ1-55	55	125	110	155	56	85	47	35
LMZJ1-75	75	155	125	186	56	85	47	35
LMZJ1-20/65	20	88	110	115	65	85	47	35
LMZJ1-30/52	30	91	110	117	52	85	47	35
LMZJ1-30/90	30	104	110	140	90	85	47	35

NOTE:


- Rated Primary current :0-5000Aac
- Rated Secondary current: 5A
- Rated load: 2.5, 3.75, 5.0, 10,15, 20,30, 45VA
- Accuracy: 0.2, 0.5, 1.0 Class
- Output Connection:2*2.5mm² Wire 1m or Terminal
- Forbidden to open the second, otherwise, easy to produce high voltage

LMZJ2 Series

Mfg P/N	Input/Output (A)	Burden(VA)/Class			Product Description
		0.2	0.5	1.0	
LMZJ2-30	100/5	---	---	1.5	 
	150/5	---	1.5	2.5	
	200/5	---	1.5	2.5	
	250/5	1.5	5	3.75	
	400/5	2.5	5	10	
LMZJ2-40	250/5	1.5	2.5	5	
	300/5	2.5	3.75	10	
	400/5	2.5	5	10	
	500/5	2.5	5	15	
	600/5	5	10	25	
LMZJ2-41	250/5	1.5	2.5	5	
	400/5	2.5	3.75	10	
	500/5	2.5	5	10	
	800/5	2.5	5	15	
	1000/5	5	10	25	
LMZJ2-42	250/5	1.5	2.5	5	
	400/5	2.5	3.75	10	
	500/5	2.5	5	10	
	800/5	2.5	5	15	
	1000/5	5	10	25	
LMZJ2-50	400/5	2.5	3.75	10	
	500/5	2.5	5	10	
	800/5	2.5	5	15	
	1000/5	5	10	25	
	1500/5	5	10	25	

Type	Ø1	Ø2	a	b	A	B	C	D
LMZJ2-30	30	99	7	34	110	127	74	85
LMZJ2-40	40	100	9	45	110	127	54	85
LMZJ2-41	41	99	10	51	110	127	49	85
LMZJ2-42	42	99	10	54	110	125	46	85
LMZJ2-50	50	114	12	63	110	140	52	85


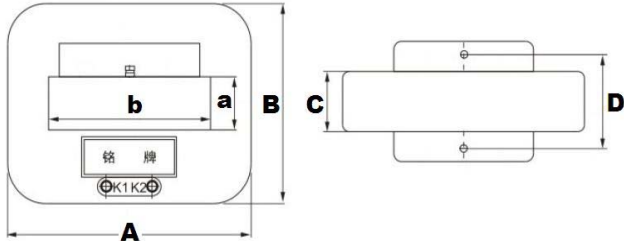
◆ **Circuit connection diagram**

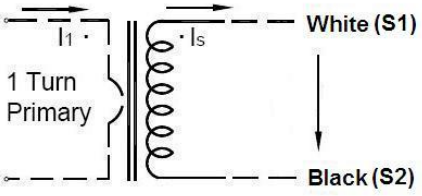

NOTE:

- Rated Primary current :0-5000Aac
- Rated Secondary current: 5A
- Rated load: 2.5, 3.75, 5.0, 10,15, 20,25,VA
- Accuracy: 0.2, 0.5, 1.0 Class
- Output Connection:2*2.5mm² Wire 1m or Terminal
- Forbidden to open the second, otherwise, easy to produce high voltage

LMZ1 Series

Mfg P/N	Input/Output (A)	Burden(VA)/Class			Product Description
		0.2	0.5	1.0	
LMZ1-32/16	250/5	1.5	2.5	5	 
	300/5	2.5	3.75	10	
	400/5	2.5	5	10	
	500/5	2.5	5	15	
	600/5	5	10	25	
LMZ1-42/16	250/5	1.5	2.5	5	
	400/5	2.5	3.75	10	
	500/5	2.5	5	10	
	800/5	2.5	5	15	
	1000/5	5	10	25	
LMZ1-62/20	500/5	2.5	10	20	
	600/5	2.5	15	25	
	800/5	2.5	15	25	
	1000/5	5	20	25	
	1500/5	7.5	30	45	
LMZ1-120/30	800/5	3.75	5	20	
	1000/5	5	10	25	
	2000/5	7.5	30	45	
	2500/5	10	30	45	
	3000/5	15	30	45	

◆ Circuit connection diagram


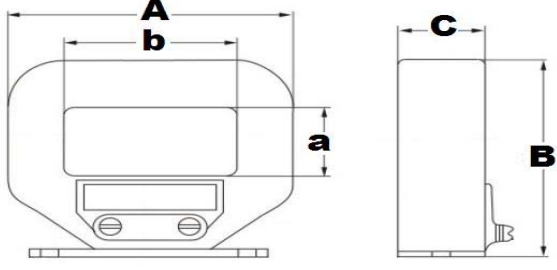
Dimensions(mm)

Type	a	b	A	B	C	D
LMZ1-32/16	16	32	96	115	46	76
LMZ1-42/16	16	42	98	117	46	76
LMZ1-62/20	20	62	103	121	46	76
LMZ1-120/30	30	120	185	133	46	76

NOTE:


- Rated Primary current :0-5000Aac
- Rated Secondary current: 5A
- Rated load: 2.5, 3.75, 5.0, 10,15, 20,30, 45VA
- Accuracy: 0.2, 0.5, 1.0 Class
- Output Connection:2*2.5mm² Wire 1m or Terminal
- Forbidden to open the second, otherwise, easy to produce high voltage

LMZ3 Series

Mfg P/N	Input/Output (A)	Burden(VA)/Class			Product Description
		0.2	0.5	1.0	
LMZ3-100/50	500/5	2.5	5	10	 
	600/5	2.5	5	10	
	800/5	2.5	5	10	
	1000/5	5	10	15	
	1500/5	7.5	10	15	
LMZ3-138/70	800/5	3.75	5	10	
	1000/5	5	10	15	
	2000/5	7.5	10	15	
	2500/5	10	15	20	
	3000/5	10	15	20	
LMZ3-82/30	500/5	2.5	10	20	
	600/5	2.5	15	25	
	800/5	2.5	15	25	
	1000/5	5	20	25	
	1500/5	7.5	30	45	
LMZ3-101/50	500/5	2.5	10	20	
	600/5	2.5	15	25	
	800/5	2.5	15	25	
	1000/5	5	20	25	
	2000/5	7.5	30	45	
LMZ3-139/70	800/5	3.75	5	20	
	1000/5	5	10	25	
	2000/5	7.5	30	45	
	2500/5	10	30	45	
	3000/5	15	30	45	

Type	a	b	A	B	C
LMZ3-100/50	50	100	168	152	36
LMZ3-138/70	70	138	215	182	42
LMZ3-82/30	30	82	150	145	60
LMZ3-101/50	50	101	160	160	60
LMZ3-139/70	70	139	215	182	55

Circuit connection diagram

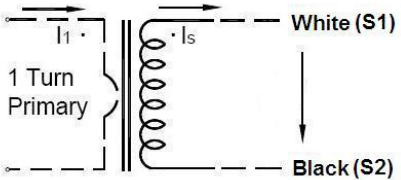

NOTE:

- Rated Primary current :0-5000Aac
- Rated Secondary current: 5A
- Rated load: 2.5, 3.75, 5.0, 10,15, 20,30, 45VA
- Accuracy: 0.2, 0.5, 1.0 Class
- Output Connection:2*2.5mm² Wire 1m or Terminal
- Forbidden to open the second, otherwise, easy to produce high voltage