


# CI TYPE CORES

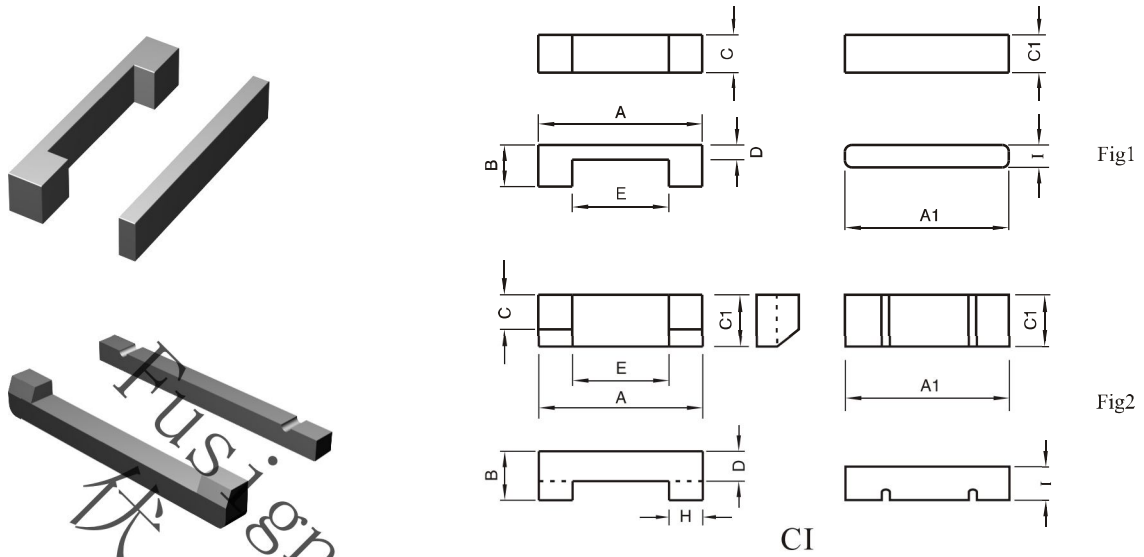

## CI TYPE CORES (MATERIALS): P1, P2, P3 Dimensions

CORES TYPE	Dimensions(mm)									
	A	B	C	D	E	H	A1	C1	I	Fig
CI 8	26.00±0.25	2.20±0.08	5.50±0.15	0.90±0.08	23.60±0.25		26.00±0.25	5.50±0.15	1.05±0.05	1
CI 8.0A	26.00±0.3	2.30±0.05	5.50±0.15	1.22±0.05	23.30min	1.25±0.05	26.00±0.3	5.50±0.15	1.05±0.05	1
CI 8.3	28.80±0.3	3.60±0.08	2.70±0.15	2.05±0.10	21.60min	3.40±0.10	29.50±0.5	3.15±0.15	1.75±0.05	2
CI 8.5	28.80±0.3	3.60±0.08	3.20±0.10	2.35±0.10	21.60min	3.40±0.10	29.50±0.5	3.50±0.10	2.20±0.05	2
CI 10	23.10±0.3	2.30±0.08	7.40±0.15	1.10±0.08	20.30±0.2		23.10±0.3	7.40±0.15	1.20±0.05	1
CI 17	22.90±0.3	3.70±0.10	13.25±0.2	2.00±0.15	18.90±0.2		22.90±0.3	13.25±0.2	2.00±0.05	1
CI 25	24.64±0.3	3.45±0.15	5.84±0.10	1.60±0.05	21.46±0.2		25.15±0.3	5.84±0.10	1.80±0.05	1

## Effective parameter

CORES TYPE	Effective parameter					
	CI (mm <sup>-1</sup> )	Le	Ae	Ve	Wt(g/set)	AL±25% $nH/N^2$
CI 8	9.56	52.51	5.49	216.84	1.37	265(P3)
CI 8.0A	9.10	53.10	5.80	310.00	1.49	280(P3)
CI 8.3	9.71	55.27	5.69	314.49	1.61	300(P3)
CI 8.5	7.15	55.44	7.75	429.66	2.05	400(P3)
CI 10	6.5	48.50	7.52	585.26	1.95	380(P3)
CI 17	1.79	48.19	26.90	6.20	1669.47	1392(P3)
CI 25	5.30	52.25	9.86	515.18	2.56	470(P3)