


## RM TYPE CORES

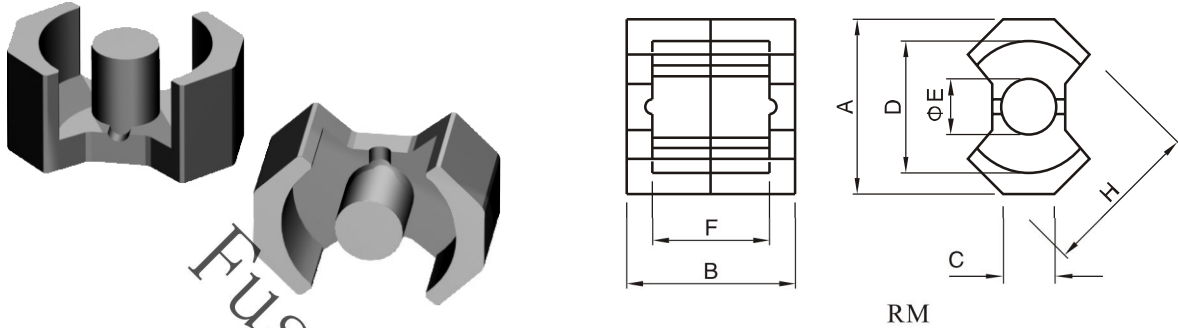

(MATERIALS):H10K, H7K, H6K, P1, P2, P3  
 Dimensions & Effective parameter

CORES TYPE	Dimensions(mm)							Effective parameter					
	A	B	C	D	ΦE	F	H	C1 (mm <sup>-1</sup> )	Ae (mm <sup>2</sup> )	Le (mm)	Ve (mm <sup>3</sup> )	Al±25% (nH/N <sup>2</sup> )	Weight (g)
RM4	10.8±0.2	10.4±0.1	4.45±0.15	8.15±0.2	3.8±0.1	7.2±0.2	9.63±0.2	1.62	14.0	22.7	318	2450min (H7K)	1.7
RM5	14.35±0.25	10.4±0.2	6.6±0.25	10.4±0.2	4.8±0.1	6.5±0.2	12.05±0.25	0.94	23.7	22.4	530	4350 min(H7K)	3.0
RM6	17.6±0.3	12.4±0.2	8.0±0.2	12.65±0.25	6.3±0.1	8.2±0.2	15.0±0.3	0.78	36.6	28.6	1050	5250 min(H7K)	5.5
RM7	19.9±0.4	13.4±0.2	7.1±0.5	15.08±0.33	7.1±0.15	8.65±0.25	16.85±0.35	0.69	46.0	31.8	1460	950min (p2)	7.2
RM8	22.75±0.45	16.4±0.2	10.8±0.2	17.3±0.3	8.4±0.15	11.0±0.2	19.7-0.7	0.59	64.0	38.0	2430	7000min (H7K)	13.0
RM10	27.85±0.65	18.6±0.1	13.25±0.25	21.65±0.45	10.7±0.2	12.7±0.3	24.15±0.55	0.45	98.0	44.0	4310	3630min (p2)	23.0
RM12	36.75±0.65	23.5±0.2	16.0±0.3	25.5±0.5	12.6±0.2	17.1±0.3	29.25±0.55	0.40	140	56.9	7960	4150 min(P2)	42.0
RM14	41.6±0.6	28.8±0.2	18.7±0.3	29.5±0.5	14.75±0.25	21.1±0.3	34.2±0.5	0.39	178	70.0	12400	4600 min(P2)	70.0